


DAMPER OPERATION MANUAL

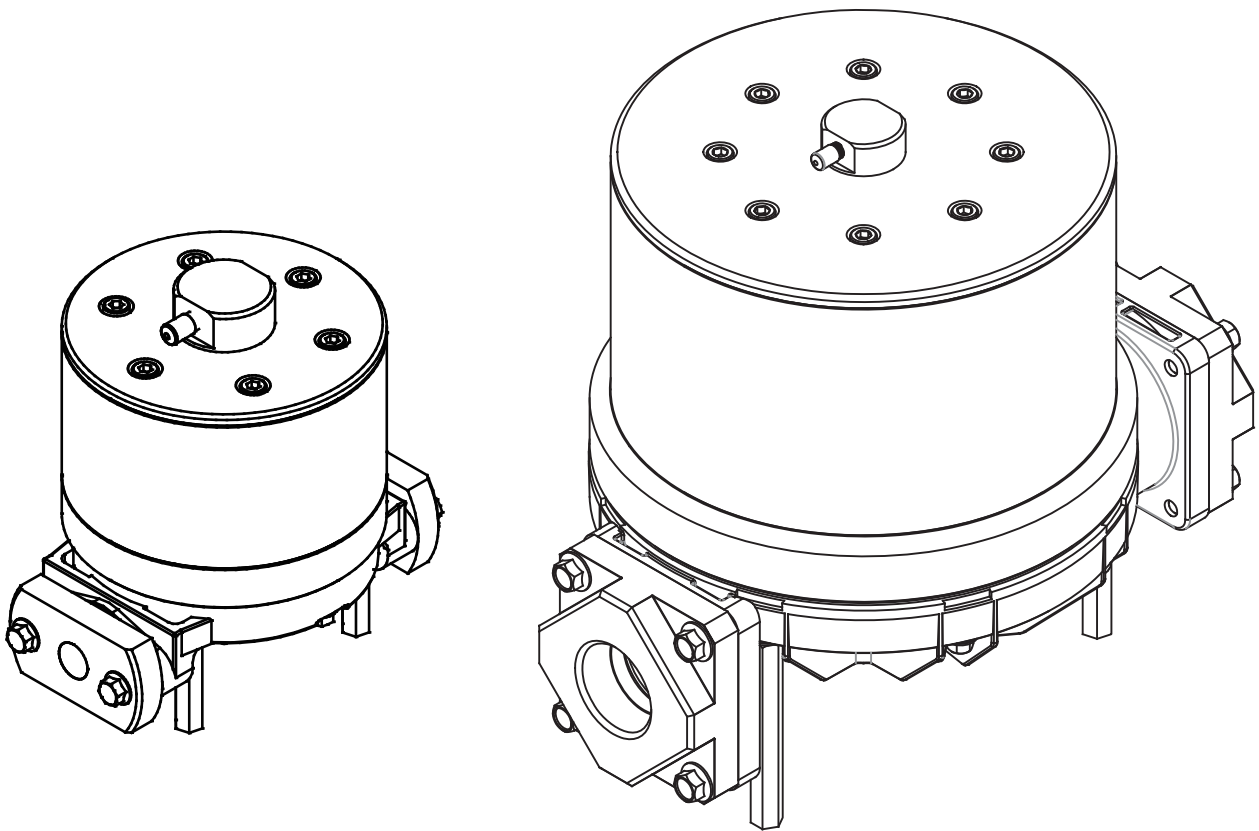

For safety purposes please be sure to read and follow the instructions contained within this manual before pump installation and operation.

CF-X Series Damper

Introduction

Thank you for Purchasing our company Damper.

This product plays an important role as an accessory of our diaphragm pump. When it is installed in the discharge line it can decrease pulsation caused by the action of the pumps then transfer fluid stably. It can be used for a wide range of application as preventing vibration of piping, protecting the filter, liquid pump for metering unit, metering gauge pump combined with flow meters.

Table of contents

Introduction.....	1
Important Items.....	2
For safe operation.....	2
For safety	3 ~ 5
Product information.....	6 ~ 16
1.Specifications.....	6
2.Accessories included with the damper	7
3.Names of parts and materials.....	8
4.Dimensions.....	13
5.Liquid Temperature Correlation Graph.....	16
Installation	17 ~ 19
1.Installing and connecting the damper	17
2.Recommended liquid piping connection diagram.....	18
3.Recommended air piping connection diagram	19
Operation	20 ~ 21
1.Damper start up.....	20
2.Stopping the damper.....	20
3.Method of cleaning the damper.....	21
Maintenance.....	22 ~ 22
Daily Maintenance checks	22
Troubleshooting.....	22

While damper is in operation do not cover the liquid inlet port with your hand or any another part of your body.

If the damper has remained unused for a long period or if you have any kind of misgivings about running the damper please consult with your local our company distributor or contact our company directly.

Important Items

For safe operation

- Before using the pump, be sure to read this document carefully, particularly the “warnings and cautions,” and be fully familiar with the correct operating procedures.
- Within this document all the warnings and cautions will be indicated by the following symbols.



WARNING

If you ignore the warning described and operate the product in an improper manner, there is danger of serious bodily injury or death.



CAUTION

If you ignore the caution described and operate the product in an improper manner, there is danger of personal injury or property damage.

Furthermore, to indicate the type of danger and damage, the following symbols are also used along with those mentioned above:



This symbol indicates a DON'T, and will be accompanied by an explanation on something you must not do.



This symbol indicates a DO, and will be accompanied by instructions on something you must do in a certain situation.



This symbol indicates important information is contained here.

For safety



WARNING






- ! · When using compressed gas (hereinafter referred to as "compressed air") to drive this damper, be sure it is one of the following:
 - 1) Compressed air supplied from an air compressor
(To drive this product, use supply air with a minimum moisture content.)
 - 2) Nitrogen (N₂) gas

The use of compressed air other than those mentioned above may cause air pollution, damage to the damper, or even an explosion.
- ! · Pressure Ratings are dependent on damper material and liquid temperature variations.
Please see the "Liquid Temperature Correlation Graph" in the [5. Performance curves] and check for the allowable operating pressure at the specific temperature of the liquid being pumped. Air pressure and discharge pressure must not exceed the allowable operating pressure. If air pressure and discharge pressure exceed the allowable operating pressure, it may cause liquid leaks, damage to the damper casings or diaphragms and could cause a fatal accident.
- ! · Before moving this product, make sure that the internal pressure is released. If the damper is moved while under pressure, any shock imparted by knocking or dropping the damper etc. may damage the damper or even cause an explosion.
- ! · Improper electrical grounding, poor ventilation, or unshielded fire or spark can create a danger of fire or explosion.
Therefore, the following precautions are strongly advised.
 - * All peripheral equipment and piping connected to this product should be properly grounded.
 - * To damper flammable liquids, use a model with a conductive aluminum or stainless-steel casing.
 - * Whenever you notice any spark while operating this product, immediately stop its operation, and do NOT start using it again unless you are sure of the cause and corrective actions have been taken out.
 - * Depending upon the type of fluid being pumped, bubbles of flammable gas may be generated. Make sure that ventilation is satisfactory.
 - * This product itself, its piping and exhaust ports should be kept away from unshielded fire, spark and other causes of ignition.
If a diaphragm is damaged, fluid may gush out together with air from the exhaust port.
 - * Do NOT leave gasoline or solvent etc. that contains waste at the work site.
 - * Machinery and other equipment near the place of installation of this product should be properly insulated to prevent electrical conduction with each other.
 - * Do NOT operate heating devices naked flames or have heating filaments anywhere near the damper or its piping.
 - * If there are flammable gases in the immediate atmosphere while the damper is operating, do NOT switch electric appliance on and off.
 - * Do NOT operate gasoline engines around the damper work site.
 - * Restrict smoking around the damper work site.

For safety



WARNING

-  · Before using this product, be sure you are familiar with the precautions regarding the fluid to be pumped, and verify the corrosion resistance of the parts that will come into contact with the fluid (wetted parts). NEVER use the product with any fluid against which it does not have sufficient corrosion resistance or with a fluid that poses a risk of explosion. If you are unsure of the corrosion resistance, contact your nearest distributor or our company directly. If you use this product with any fluid against which the parts that will come in contact with the fluid do not have sufficient corrosion resistance, it may result in damaging the product or leakage of fluid or damper failure.
-  · When using this product, observe local relevant regulatory rules concerning transfer and storage of chemicals, fire prevention, labor safety standards, etc.
-  · Hazardous fluids (such as strong acid or alkali, flammable or toxic liquids) or gas bubbles generated by such fluids may cause serious injury or even death if accidentally inhaled or consumed or if they come into contact with the eyes or adhere to the skin. Therefore, the following precautions are strongly advised.
 - *Be fully familiar with the properties of the fluid to be pumped and work in strict accordance with the operating instructions provided by the suppliers of such fluids (such as wearing goggles, gloves, mask or protective work clothes).
 - *When storing a hazardous fluid, strictly comply with the regulatory procedures (such as using proper containers, storage conditions, etc.).
 - *Install the piping and exhaust port of this pump away from areas frequented by human and animal traffic if there is a risk that transferring liquids may affect the human body.
-  · In case of transferring a high temperature fluid, casing and piping heated and may cause burns by touching.
-  · High purity PTFE series dampers are intended for pumping hazardous fluids such as those that contain strong acids or organic solvents. If you find any irregularity in this product, do NOT try to disassemble or service the product yourself. Contact your dealer or our regional office for service. If you disassemble or service this product yourself and if further irregularity occurs, it may cause a great risk, depending upon the kind of fluid to be pumped.

For safety



CAUTION



- If a diaphragm of this product is damaged, the supplied air may mix with the fluid or the fluid may flow into the main body (air-switching portion). If the air supply is inadequate or the damper is contaminated, do NOT operate the damper.



- After you shut down the damper and disconnect the piping, some fluid may still be remaining inside the damper. Also, if the damper is left unused for a prolonged period, some fluid may remain inside the damper and within the connected piping. Therefore, be sure to purge the system of fluid and clean the damper before prolonged disuse or storage. If the product is left unused for a prolonged period with fluid remaining in the connected piping as well as the damper itself, the fluid may expand, depending on the ambient temperature (because of freezing or heat), which may cause damage to the damper and/or piping and possible leakage of fluid.



- The Dampers Non wetted parts are made from various materials and are not designed to withstand corrosive chemicals. Therefore there is a possibility of damage to the dampers non wetted parts through leaks or breakage of the diaphragm as well as liquid or gas permeation through the actual diaphragm material. There is also a possibility of damage due to chemical fumes in the local environment or fumes entering into the air line through the compressor. It is also possible to damage these components when incorrect lubrication is used. To help prevent any unnecessary damage please follow the following precautions. Ventilation of the local environment, remove liquids when the pump is not in use. (Long term). Open ventilation of the switching area of pump. Clean and flush the pumps air switching section if a leak or diaphragm breakage occurs.



- For safe transport be sure to prevent liquid leaking from damper for safe transport.
It is the end-users responsibility to thoroughly wash and clean the damper(s) to prevent accidents caused by liquid leaks.



- Always use genuine parts when replacing component parts of this product. Do not attempt to modify the components parts or replace them with anything other than genuine parts.

Product information

1. Specifications

Model	CF-X10A □ , CF-X10S □ [CF-X10A □ N, CF-X10S □ N]	CF-X10P □ [CF-X10P □ N]
Liquid port	Rc 3/8 [NPT 3/8]	
Material • Weight	Table 1	
Operating pressure	0 ~ 0.7 MPa [0-100 psi]	0 ~ 0.7 MPa ※ 1 [0-100 psi] ※ 1
Max discharge pressure	0.7 MPa [100 psi]	
Max air consumption	20 L/min(ANR) [0.70 SCFM]	
Max solid size	3 mm or less	
Ambient temperature	0 ~ 70 °C [32-158 °F]	
Liquid temperature	※ 2	0 ~ 60°C [32-140 °F]
Dimensions	Table 2	

※ 1 The maximum supply air pressure of the pump depends on the liquid temperature. (Table 3)

※ 2 DIAPHRAGMS. NBR/CR 0 ~ 70°C [32-158 °F]
 TPEE/EPDM 0 ~ 80°C [32-176 °F]
 FKM/TPO/PTFE/PTFE • EPDM 0 ~ 100°C [32-212 °F]

Model	CF-X15A □ , CF-X15S □ [CF-X15A □ N, CF-X15S □ N]	CF-X15P □ , CF-X15V □ , CF-X15DT [CF-X15P □ N, CF-X15V □ N, CF-X15DTN]
Liquid port	Rc 1/2 [NPT 1/2]	
Material • Weight	Table 1	
Operating pressure	0 ~ 0.7 MPa [0-100 psi]	0 ~ 0.7 MPa ※ 1 [0-100 psi] ※ 1
Max discharge pressure	0.7 MPa [100 psi]	
Max air consumption	20 L/min(ANR) [0.70 SCFM]	
Max solid size	5 mm or less	
Ambient temperature	0 ~ 70 °C [32-158 °F]	
Liquid temperature	※ 2	0 ~ 60°C [32-140 °F]
Dimensions	Table 2	

※ 1 The maximum supply air pressure of the pump depends on the liquid temperature. (Table 3)

※ 2 DIAPHRAGMS. NBR/CR 0 ~ 70°C [32-158 °F]
 TPEE/EPDM 0 ~ 80°C [32-176 °F]
 FKM/TPO/PTFE/PTFE • EPDM 0 ~ 100°C [32-212 °F]

Model	CF-X25A □ , CF-X25S □ [CF-X25A □ N, CF-X25S □ N]	CF-X25G □ , CF-X25V □ [CF-X25G □ N, CF-X25V □ N]
Liquid port	Rc 1 [NPT 1]	
Material • Weight	Table 1	
Operating pressure	0 ~ 0.7 MPa [0-100 psi]	0 ~ 0.7 MPa ※ 1 [0-100 psi] ※ 1
Max discharge pressure	0.7 MPa [100 psi]	
Max air consumption	20 L/min(ANR) [0.70 SCFM]	
Max solid size	8 mm or less	
Ambient temperature	0 ~ 70 °C [32-158 °F]	
Liquid temperature	※ 2	0 ~ 60°C [32-140 °F]
Dimensions	Table 2	

※ 1 The maximum supply air pressure of the pump depends on the liquid temperature. (Table 3)

※ 2 DIAPHRAGMS. NBR/CR 0 ~ 70°C [32-158 °F]
 TPEE/EPDM 0 ~ 80°C [32-176 °F]
 FKM/TPO/PTFE/PTFE • EPDM 0 ~ 100°C [32-212 °F]

Product information					

Model	CF-X40A □, CF-X40S □ (Except T) [CF-X40A □ N, CF-X40S □ N]	CF-X40AT, CF-X40AW CF-X40ST, CF-X40SW [CF-X40ATN, CF-X40AWN CF-X40STN, CF-X40SWN]	CF-X40G □, CF-X40V □ [CF-X40G □ N, CF-X40V □ N]
Liquid port	Rc 1 • 1/2 [NPT 1 • 1/2]		
Material • Weight	Table 1		
Operating pressure	0 ~ 0.85 MPa [0-125 psi]	0 ~ 0.7 MPa [0-100 psi]	0 ~ 0.7 MPa ※ 1 [0-100 psi] ※ 1
Max discharge pressure	0.85 MPa [125 psi]	0.7 MPa [100 psi]	
Max air consumption	20 L/min(ANR) [0.70 SCFM]		
Max solid size	12 mm or less		
Ambient temperature	0 ~ 70 °C [32-158 °F]		
Liquid temperature	※ 2		0 ~ 60°C [32-140 °F]
Dimensions	Table 2		

※ 1 The maximum supply air pressure of the pump depends on the liquid temperature. (Table 3)

※ 2 DIAPHRAGMS.	NBR/CR	0 ~ 70℃ [32-158 ℉]
	TPEE/EPDM	0 ~ 80℃ [32-176 ℉]
	FKM/TPO/PTFE/PTFE・EPDM	0 ~ 100℃ [32-212 ℉]

Model	CF-X50A □, CF-X50S □ (Except T) [CF-X50A □ N, CF-X50S □ N]	CF-X50AT, CF-X50AW CF-X50ST, CF-X50SW [CF-X50ATN, CF-X50AWN CF-X50STN, CF-X50SWN]	CF-X50G □, CF-X50V □ [CF-X50G □ N, CF-X50V □ N]
Liquid port	Rc 2 [NPT 2]		
Material • Weight	Table 1		
Operating pressure	0 ~ 0.85 MPa [0-125 psi]	0 ~ 0.7 MPa [0-100 psi]	0 ~ 0.7 MPa ※ 1 [0-100 psi] ※ 1
Max discharge pressure	0.85 MPa [125 psi]	0.7 MPa [100 psi]	
Max air consumption	20 L/min(ANR) [0.70 SCFM]		
Max solid size	15 mm or less		
Ambient temperature	0 ~ 70 °C [32-158 °F]		
Liquid temperature	※ 2		0 ~ 60°C [32-140 °F]
Dimensions	Table 2		

※ 1 The maximum supply air pressure of the pump depends on the liquid temperature. (Table 3)

※ 2 DIAPHRAGMS.	NBR/CR	0 ~ 70°C [32-158 °F]
	TPEE/EPDM	0 ~ 80°C [32-176 °F]
	FKM/TPO/PTFE/PTFE・EPDM	0 ~ 100°C [32-212 °F]

Model	CF-X10HT [CF-X10HTN]	CF-X25HT [CF-X25HTN]	CF-X40HT [CF-X40HTN]
Liquid port	Rc 3/8 [NPT 3/8]	Rc 3/4 [NPT 3/4]	Rc 1 [NPT 1]
Material • Weight	Table 1		
Operating pressure	0 ~ 0.5 MPa ※ 1 [0-70 psi] ※ 1	0 ~ 0.7 MPa ※ 1 [0-100 psi] ※ 1	
Max discharge pressure	0.5 MPa [70 psi]	0.7 MPa [100 psi]	
Max air consumption	20 L/min(ANR) [0.70 SCFM]		
Max solid size	1 mm or less	3 mm or less	
Ambient temperature	0 ~ 70 °C [32-158 °F]		
Liquid temperature	0 ~ 80°C [32-176 °F]		
Dimensions	Table 2		

※ 1 The maximum supply air pressure of the pump depends on the liquid temperature. (Table 3)

※ 2 The quality of the compressed air should satisfy the Quality Classes 2 – 3 – 2 of "JIS B8392-1:2000 General Compressed Air".
(Maximum diameter of a particle: 1 μ m, Maximum pressure dew-point: -20°C, Maximum oil content : 0.1 mg/m3)

2. Accessories included with the pump

- ☐ Pump Safety Manual..... 1
- ☐ Silencer..... 1 (HT series only)

Product information




CAUTION

- After delivery open the product packaging and check to make sure that all included accessories are present and in good order.
- Remember that the damper is heavy, so extreme care must be taken when lifting it. When lifting the damper using a chain hoist or crane, be sure to lift the damper by the specified lift point(s). Be careful that nobody will pass under the damper when you lift it. It will be very dangerous if the damper should fall.
- When installing the accessories, please use the pipe sealing tape as provided for each threaded position. Also take care that broken or shredded pipe sealing tape does not contaminate the liquid or Air inlets. Note that a contaminated airline may cause failure of the dampers air switching unit.

3.Names of parts and materials

Outside view

10 □

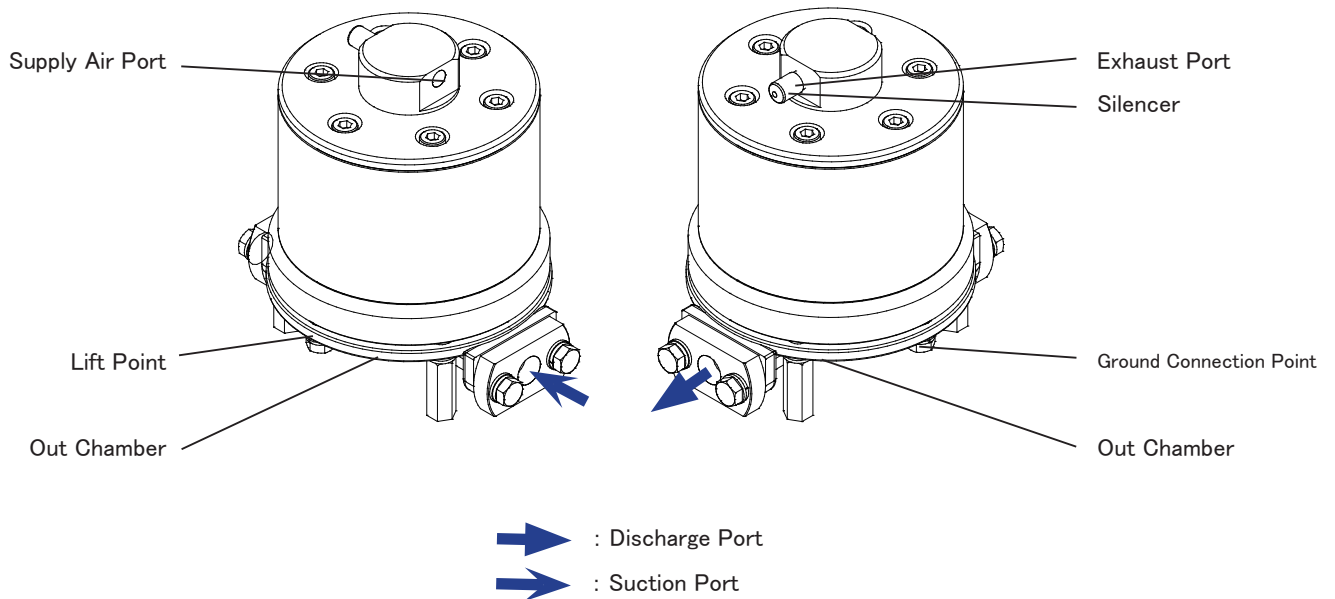

Material and weight

10 □	AC [ACN]	AN [ANN]	AT [ATN]	AH [AHN]	AS [ASN]	AW [AWN]	SC [SCN]	SN [SNN]	ST [STN]	SH [SHN]	SS [SSN]	SW [SWN]
Damper Wetted Parts	ADC12						SCS14					
Diaphragm	CR	NBR	PTFE	TPEE	TPO	PTFE • EPDM	CR	NBR	PTFE	TPEE	TPO	PTFE • EPDM
Valve Stopper	PA						SCS14					
O Ring	PTFE						NBR	NBR	PTFE	NBR	EPDM	PTFE
Valve Seat	A5056						SUS316					
Center Disk	A5056					-	SUS316					-
Weight	3.5 kg [7.7 lbs]						4.3 kg [9.5 lbs]					


Table 1

Product information

10 □	PC [PCN]	PN [PNN]	PT [PTN]	PH [PHN]	PS [PSN]	PW [PWN]
Damper Wetted Parts	PP					
Diaphragm	CR	NBR	PTFE	TPEE	TPO	PTFE・ EPDM
Valve Stopper	PP					
O Ring	NBR	NBR	PTFE	NBR	EPDM	PTFE
Valve Seat	PP					
Center Disk	PP					-
Weight	3.6 kg [7.9 lbs]					

Outside view

15 □

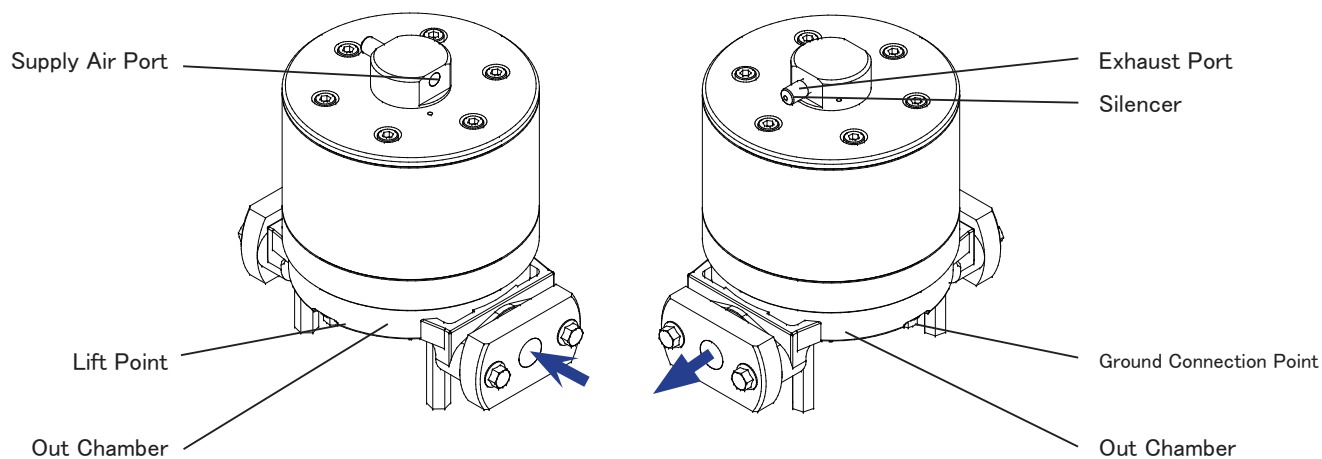

➡ : Discharge Port
➡ : Suction Port

Material and weight

15 □	AC [ACN]	AN [ANN]	AT [ATN]	AH [AHN]	AS [ASN]	AW [AWN]	SC [SCN]	SN [SNN]	ST [STN]	SH [SHN]	SS [SSN]	SW [SWN]
Damper Wetted Parts	ADC12						SCS14					
Diaphragm	CR	NBR	PTFE	TPEE	TPO	PTFE・ EPDM	CR	NBR	PTFE	TPEE	TPO	PTFE・ EPDM
Valve Stopper	PA						SCS14					
O Ring	NBR	NBR	PTFE	NBR	EPDM	PTFE	NBR	NBR	PTFE	NBR	EPDM	PTFE
Valve Seat	A5056						SUS316					
Center Disk	A5056					-	SUS316					-
Weight	5.2 kg [11.5 lbs]						6.7 kg [14.8 lbs]					


Product information

15 □	PC [PCN]	PN [PNN]	PT [PTN]	PH [PHN]	PS [PSN]	PW [PWN]	VT [VTN]	VS [VSN]	VW [VWN]	DT [DTN]
Damper Wetted Parts	PP						PVDF			POM
Diaphragm	CR	NBR	PTFE	TPEE	TPO	PTFE • EPDM	PTFE	TPO	PTFE • EPDM	PTFE
Valve Stopper	PP						PVDF			POM
O Ring	NBR	NBR	PTFE	NBR	EPDM	PTFE	PTFE			PTFE
Valve Seat	PP						PVDF			POM
Center Disk	PP					—	PVDF		—	POM
Weight	5.0 kg [11.0 lbs]						5.4 kg [11.9 lbs]			4.8 kg [10.6 lbs]

Table 1

Outside view

25 □

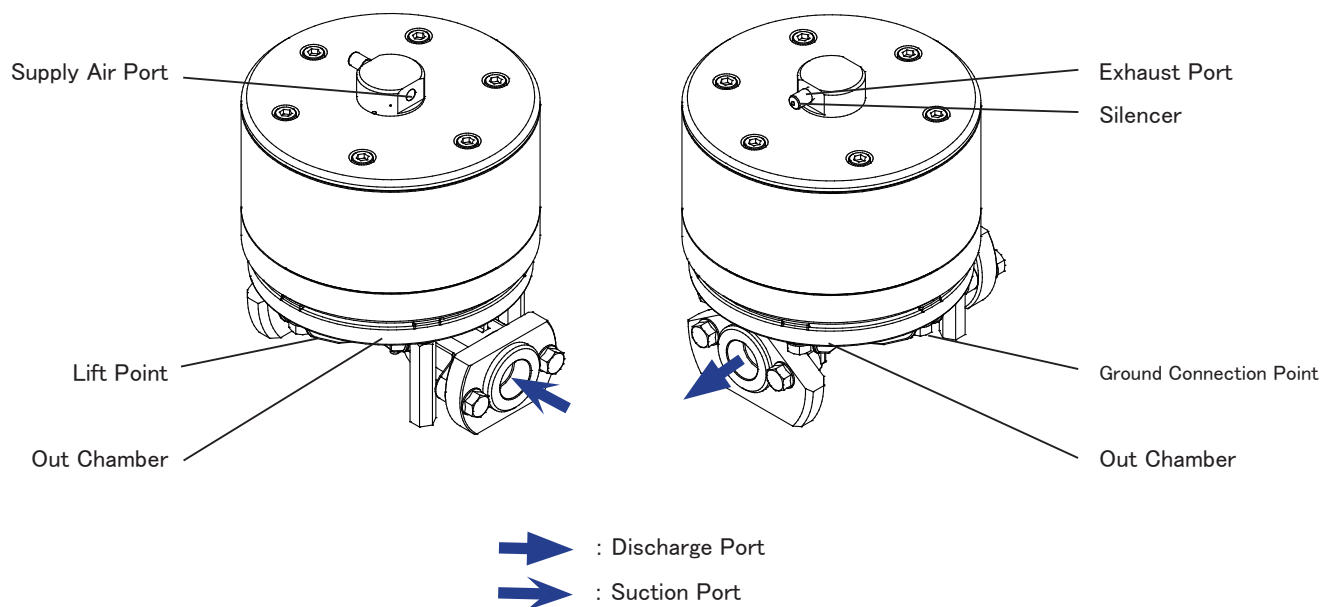

Material and weight

25 □	AC [ACN]	AN [ANN]	AE [AEN]	AV [AVN]	AT [ATN]	AH [AHN]	AS [ASN]	AW [AWN]	SC [SCN]	SN [SNN]	SE [SEN]	SV [SVN]	ST [STN]	SH [SHN]	SS [SSN]	SW [SWN]
Damper Wetted Parts	ADC12								SCS14							
Diaphragm	CR	NBR	EPDM	FKM	PTFE	TPEE	TPO	PTFE • EPDM	CR	NBR	EPDM	FKM	PTFE	TPEE	TPO	PTFE • EPDM
O Ring	NBR	NBR	EPDM	FKM	PTFE	NBR	EPDM	PTFE	NBR	NBR	EPDM	FKM	PTFE	NBR	EPDM	PTFE
Center Disk	SUS316				A5056	SUS316		–	SUS316							–
Weight	10.0 kg [22.1 lbs]								15.0 kg [33.1 lbs]							


Product information

25 □	GC [GCN]	GN [GNN]	GE [GEN]	GV [GVN]	GT [GTN]	GH [GHN]	GS [GSN]	GW [GWN]	VT [VTN]	VS [VSN]	VW [VWN]
Damper Wetted Parts	PPG								PVDF		
Diaphragm	CR	NBR	EPDM	FKM	PTFE	TPEE	TPO	PTFE • EPDM	PTFE	TPO	PTFE • EPDM
Valve Stopper	PPG								PVDF		
O Ring	NBR	NBR	EPDM	FKM	PTFE	NBR	EPDM	PTFE	PTFE	EPDM	PTFE
Valve Seat	PPG								PVDF		
Center Disk	PPG							-	PVDF		-
Weight	10.0 kg [22.1 lbs]								11.0 kg [24.3 lbs]		

Table 1

Outside view

40 □ • 50 □

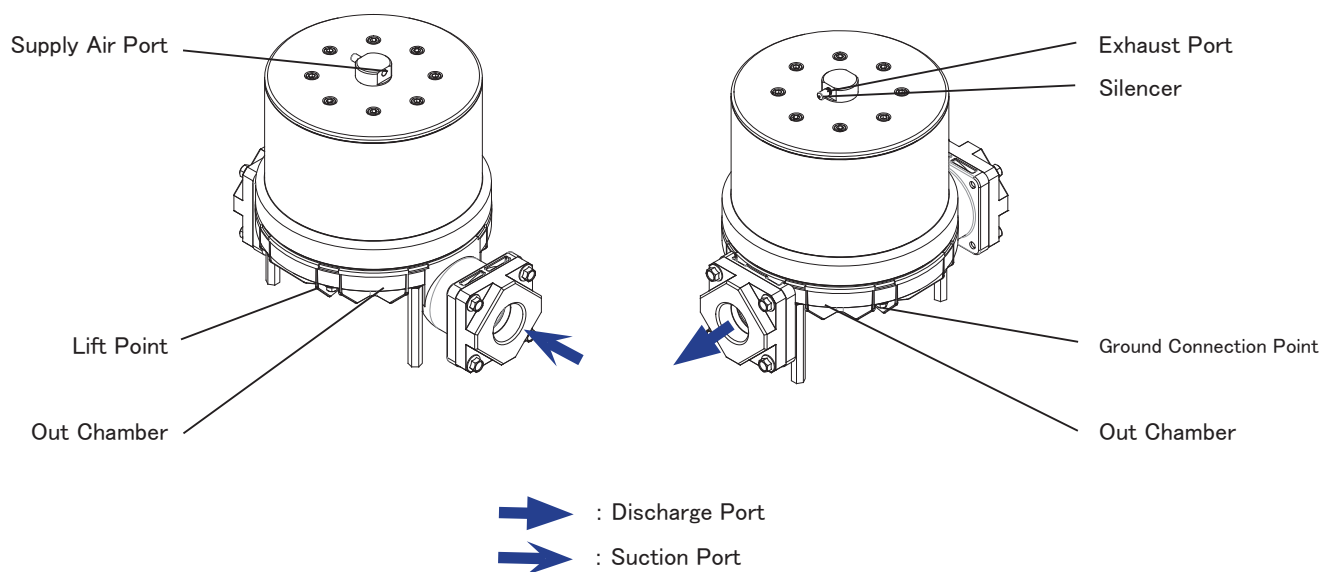

Material and weight

40 □	AC [ACN]	AN [ANN]	AE [AEN]	AV [AVN]	AT [ATN]	AH [AHN]	AS [ASN]	AW [AWN]	SC [SCN]	SN [SNN]	SE [SEN]	SV [SVN]	ST [STN]	SH [SHN]	SS [SSN]	SW [SWN]
Damper Wetted Parts	ADC12								SCS14							
Diaphragm	CR	NBR	EPDM	FKM	PTFE	TPEE	TPO	PTFE • EPDM	CR	NBR	EPDM	FKM	PTFE	TPEE	TPO	PTFE • EPDM
O Ring	NBR	NBR	EPDM	FKM	PTFE	NBR	EPDM	PTFE	NBR	NBR	EPDM	FKM	PTFE	NBR	EPDM	PTFE
Center Disk	A5056							-	SUS316							-
Weight	22.0 kg [48.5 lbs]								32.0 kg [70.6 lbs]							

40 □	GC [GCN]	GN [GNN]	GE [GEN]	GV [GVN]	GT [GTN]	GH [GHN]	GS [GSN]	GW [GWN]	VT [VTN]	VS [VSN]	VW [VWN]
Damper Wetted Parts	PPG								PVDF		
Diaphragm	CR	NBR	EPDM	FKM	PTFE	TPEE	TPO	PTFE • EPDM	PTFE	TPO	PTFE • EPDM
O Ring	NBR	NBR	EPDM	FKM	PTFE	NBR	EPDM	PTFE	PTFE		
Center Disk	PPG							-	PVDF		-
Weight	21.0 kg [46.3 lbs]								23.0 kg [50.7 lbs]		

Product information


50 □	AC [ACN]	AN [ANN]	AE [AEN]	AV [AVN]	AT [ATN]	AH [AHN]	AS [ASN]	AW [AWN]	SC [SCN]	SN [SNN]	SE [SEN]	SV [SVN]	ST [STN]	SH [SHN]	SS [SSN]	SW [SWN]
Damper Wetted Parts	ADC12								SCS14							
Diaphragm	CR	NBR	EPDM	FKM	PTFE	TPEE	TPO	PTFE • EPDM	CR	NBR	EPDM	FKM	PTFE	TPEE	TPO	PTFE • EPDM
O Ring	NBR	NBR	EPDM	FKM	PTFE	NBR	EPDM	PTFE	NBR	NBR	EPDM	FKM	PTFE	NBR	EPDM	PTFE
Center Disk	A5056								SUS316							
Weight	29.0 kg [63.9 lbs]								42.0 kg [92.6 lbs]							

50 □	GC [GCN]	GN [GNN]	GE [GEN]	GV [GVN]	GT [GTN]	GH [GHN]	GS [GSN]	GW [GWN]	VT [VTN]	VS [VSN]	VW [VWN]
Damper Wetted Parts	PPG								PVDF		
Diaphragm	CR	NBR	EPDM	FKM	PTFE	TPEE	TPO	PTFE • EPDM	PTFE	TPO	PTFE • EPDM
O Ring	NBR	NBR	EPDM	FKM	PTFE	NBR	EPDM	PTFE	PTFE		PTFE
Center Disk	PPG								PVDF		–
Weight	25.0 kg [55.1 lbs]								27.0 kg [59.5 lbs]		

Table 1

Outside view

□ HT

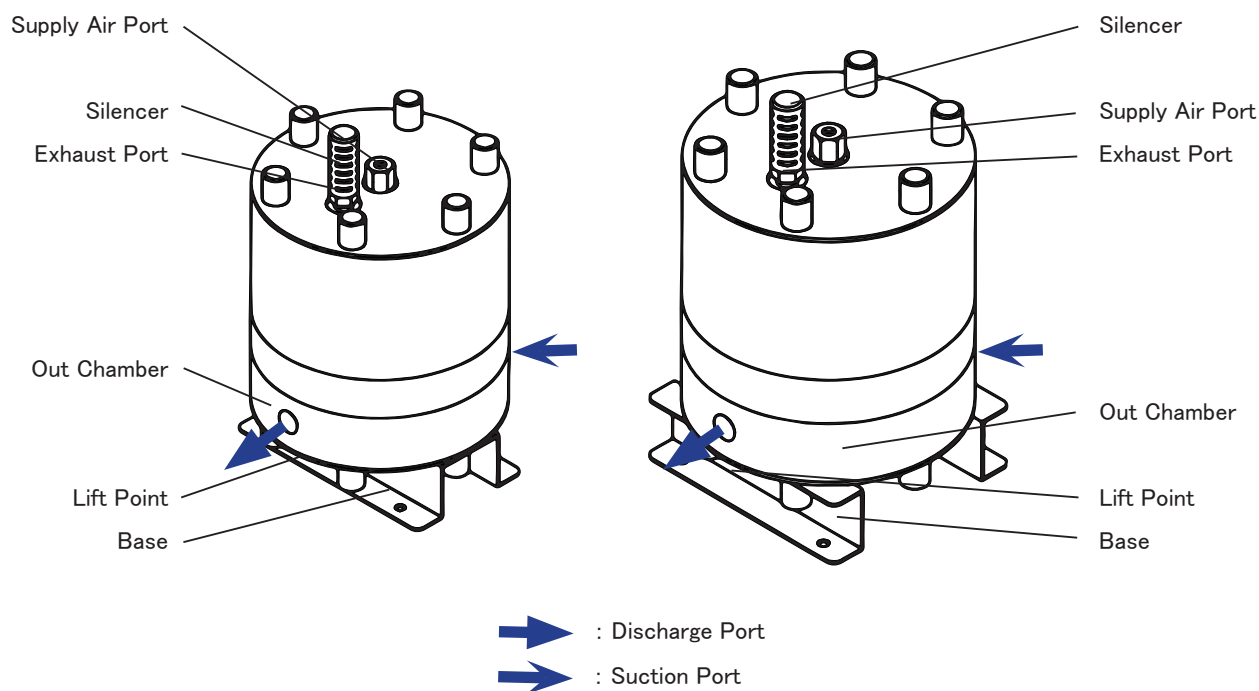


Material and weight

□ HT	10HT [10HTN]	25HT [25HTN]	40HT [40HTN]
Pump Wetted Parts	PTFE		
Diaphragm	PTFE		
O Ring	PTFE		
Center Disk	SUS304	SUS316	
Weight	4.3 kg [9.5 lbs]	12.0 kg [26.5 lbs]	29.0 kg [63.9 lbs]


Table 1

Product information

4.Dimensions

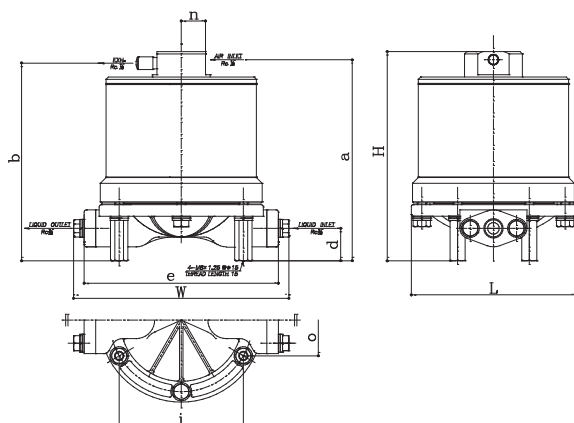

10A □ [10A □ N] · 10S □ [10S □ N]

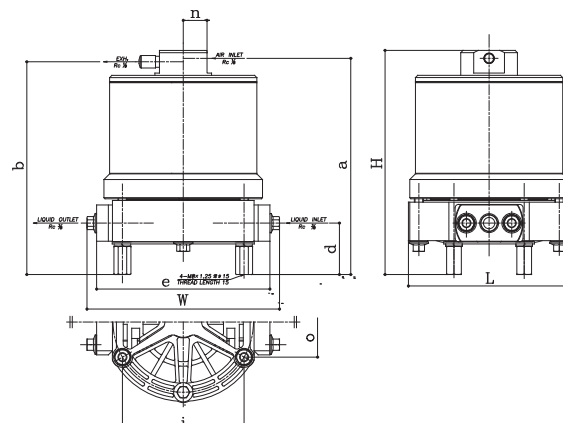


10P □ [10P □ N]


MODEL	H	W	L	a	b	d	e	i	n	o	AIR INLET/EXH	LIQUID IN/OUT
10A □ [10A □ N]	181 [7.13]	186 [7.32]	142 [5.59]	174 [6.85]	171 [6.73]	28 [1.10]	168 [6.61]	107 [4.21]	21 [0.83]	62 [2.44]	Rc1/8 [NPT1/8]	Rc3/8 Rc3/8
10S □ [10S □ N]	179 [7.05]	187 [7.36]		171 [6.73]	168 [6.61]	26 [1.02]	169 [6.65]					
10P □ [10P □ N]	198 [7.80]	170 [6.69]	142 [5.59]	191 [7.52]	188 [7.40]	45 [1.77]	153 [6.02]	107 [4.21]	21 [0.83]	62 [2.44]		

(Measure : mm [inch])

Table 2

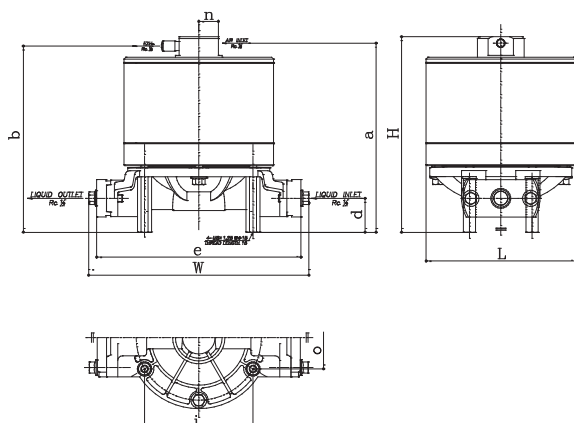

15A □ [15A □ N] · 15S □ [15S □ N]

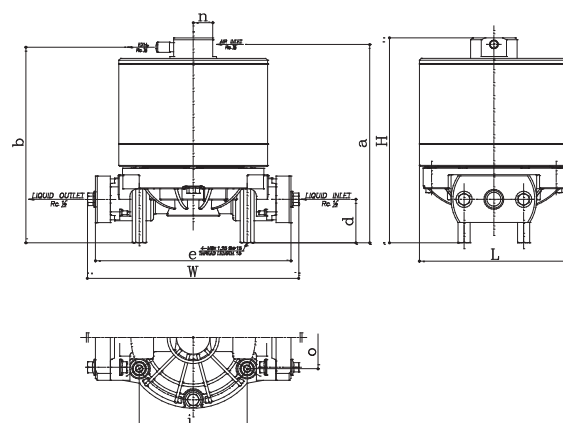


15P □ [15P □ N] · 15V □ [15V □ N] · 15D □ [15D □ N]

MODEL	H	W	L	a	b	d	e	i	n	o	AIR INLET/EXH	LIQUID IN/OUT
15A □ [15A □ N]	209 [8.23]	246 [9.69]	160 [6.30]	202 [7.95]	199 [7.83]	36 [1.42]	229 [9.02]	116 [4.57]	21 [0.83]	67 [2.64]	Rc1/8 [NPT1/2]	Rc1/2 [NPT1/2]
15S □ [15S □ N]	206 [8.11]	236 [9.29]		199 [7.83]	196 [7.72]	33 [1.30]	219 [8.62]					
15P □ [15P □ N]	220 [8.66]	227 [8.94]	160 [6.30]	213 [8.39]	210 [8.27]	47 [1.85]	210 [8.27]	116 [4.57]	21 [0.83]	67 [2.64]		
15V □ [15V □ N]												
15D □ [15D □ N]												


(Measure : mm [inch])

Table 2

Product information

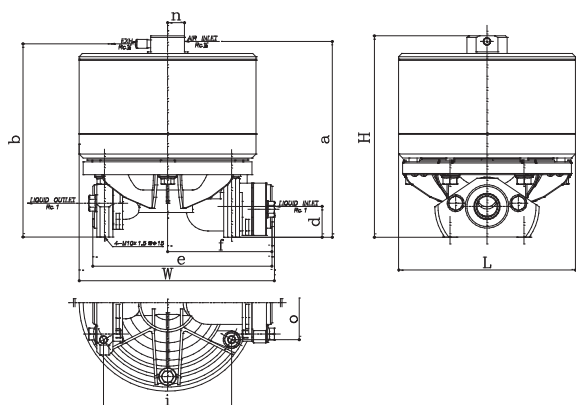

25A □ [25A □ N] · 25S □ [25S □ N]

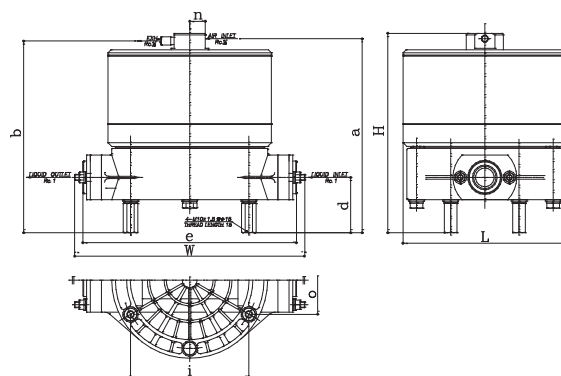


25G □ [25G □ N] · 25V □ [25V □ N]


MODEL	H	W	L	a	b	d	e	f	i	n	o	AIR INLET/EXH	LIQUID IN/OUT
25A □ [25A □ N]	251	243	220	244	240	38 [1.50]	223	130	159	21	92	Rc1/8 [NPT 1/8]	Rc1 [NPT1]
25S □ [25S □ N]	[9.88]	[9.57]	[8.66]	[9.61]	[9.45]	37 [1.46]	[8.78]	[5.12]	[6.26]	[0.83]	[3.62]		
25G □ [25G □ N]	268	310	220	261	258	75	288 [11.34]		159	21	92		
25V □ [25V □ N]	[10.55]	[12.20]	[8.66]	[10.28]	[10.16]	[2.95]	286 [11.26]		[6.26]	[0.83]	[3.62]		

(Measure : mm [inch])

Table 2

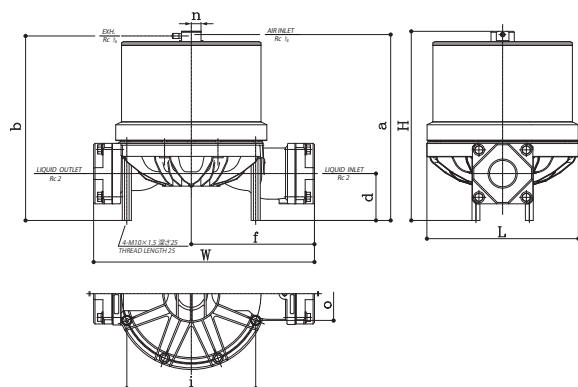

40A □ [40A □ N] · 40S □ [40S □ N]

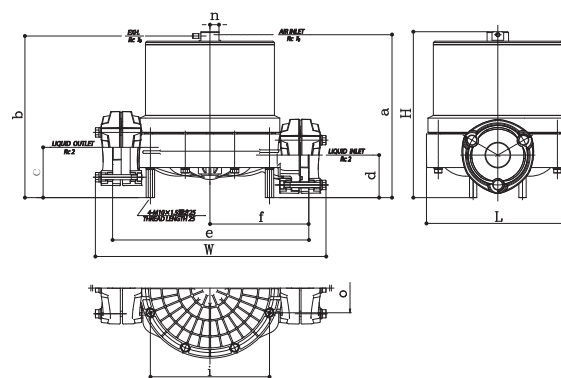



40G □ [40G □ N] · 40V □ [40V □ N]

MODEL	H	W	L	a	b	c	d	f	i	n	o	AIR INLET/EXH	LIQUID IN/OUT
40A □ [40A □ N]	354	394	280	347	344		85	218	235	21	97	Rc1/8 [NPT1/8]	Rc1 · 1/2 [NPT1 · 1/2]
40S □ [40S □ N]	[13.94]	[15.51]	[11.02]	[13.66]	[13.54]		[3.35]	[8.58]	[9.25]	[0.83]	[3.82]		
40G □ [40G □ N]	335	442	284	328	325	98	84		235	21	117		
40V □ [40V □ N]	[13.19]	[17.40]	[11.18]	[12.91]	[12.80]	[3.86]	[3.31]		[9.25]	[0.83]	[4.61]		

(Measure : mm [inch])

Table 2

Product information

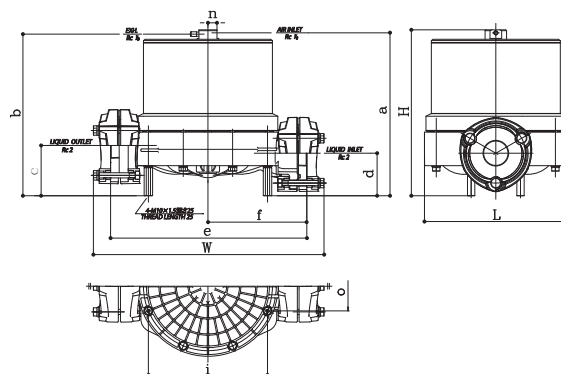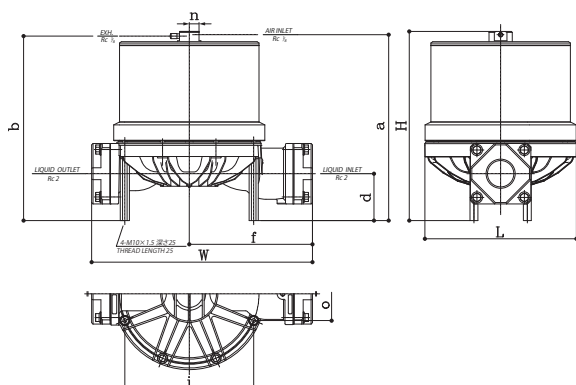

50A □ [50A □ N] · 50S □ [50S □ N]


50G □ [50G □ N] · 50V □ [50V □ N]

MODEL	H	W	L	a	b	c	d	e	f	i	n	o	AIR INLET/EXH	LIQUID IN/OUT
50A □ [50A □ N]	407	475	326	400	397		101		265	277	21	115	Rc1/8 [NPT1/8]	Rc2 [NPT2]
50S □ [50S □ N]	[16.02]	[18.70]	[12.83]	[15.75]	[15.63]		[3.98]		[10.43]	[10.91]	[0.83]	[4.53]		
50G □ [50G □ N]	386	537	332	379	376	117	99	457	230	277	21	115		
50V □ [50V □ N]	[15.20]	534	330	[14.92]	[14.80]	[4.61]	[3.90]	454	228					
		[21.02]	[12.99]					[17.87]	[8.98]					


(Measure : mm [inch])

Table 2


Product information

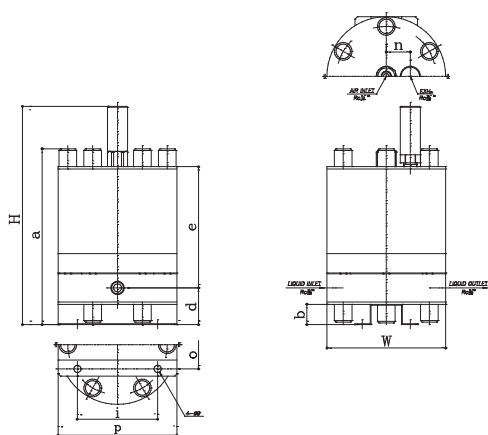

10HT [10HTN]

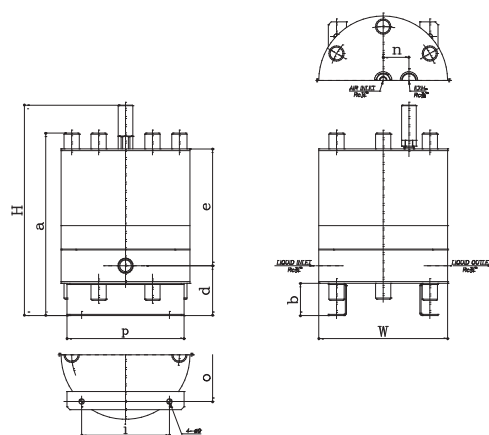

25HT [25HTN]

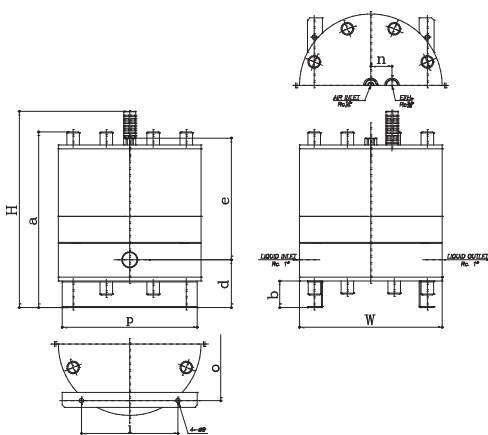

40HT [40HTN]

MODEL	H	W	a	b	d	e	i	n	o	p	AIR INLET	AIR EXH	LIQUID IN/OUT
10HT [10HTN]	271 [10.67]	148 [5.83]	218 [8.58]	25 [0.98]	46 [1.81]	151 [5.94]	100 [3.94]	30 [1.18]	60 [2.36]	148 [5.83]	Rc1/4 [NPT1/4]	Rc3/8 [NPT3/8]	Rc3/8 [NPT3/8]
25HT [25HTN]	359 [14.13]	220 [8.66]	312 [12.28]	55 [2.17]	85 [3.35]	199 [7.83]	150 [5.91]	44 [1.73]	159 [6.26]	200 [7.87]	Rc1/4 [NPT1/4]	Rc3/8 [NPT3/8]	Rc3/4 [NPT3/4]
40HT [40HTN]	407 [16.02]	296 [11.65]	364 [14.33]	55 [2.17]	99 [3.90]	252 [9.92]	200 [7.87]	44 [1.73]	235 [9.25]	280 [11.02]	Rc1/4 [NPT1/4]	Rc3/8 [NPT3/8]	Rc1 [NPT1]

(Measure : mm [inch])

Table 2


5.Liquid Temperature Correlation Graph



NOTICE

- The maximum safe operating pressure of the pump depends on the liquid temperature. Always refer to Specifications and this liquid temperature correlation graph when determining the correct air pressure.

Liquid Temperature Correlation Graph

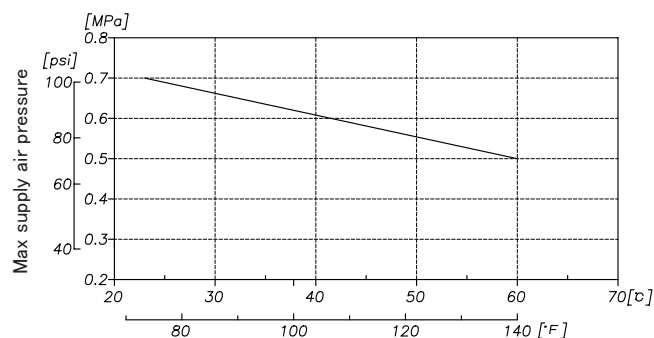

Liquid TEMP.


Table 3

Installation

1.Installing and connecting the pump

- Decide where the damper should be installed and secure a suitable space (see Examples of installations A to D).

Examples of pump installations

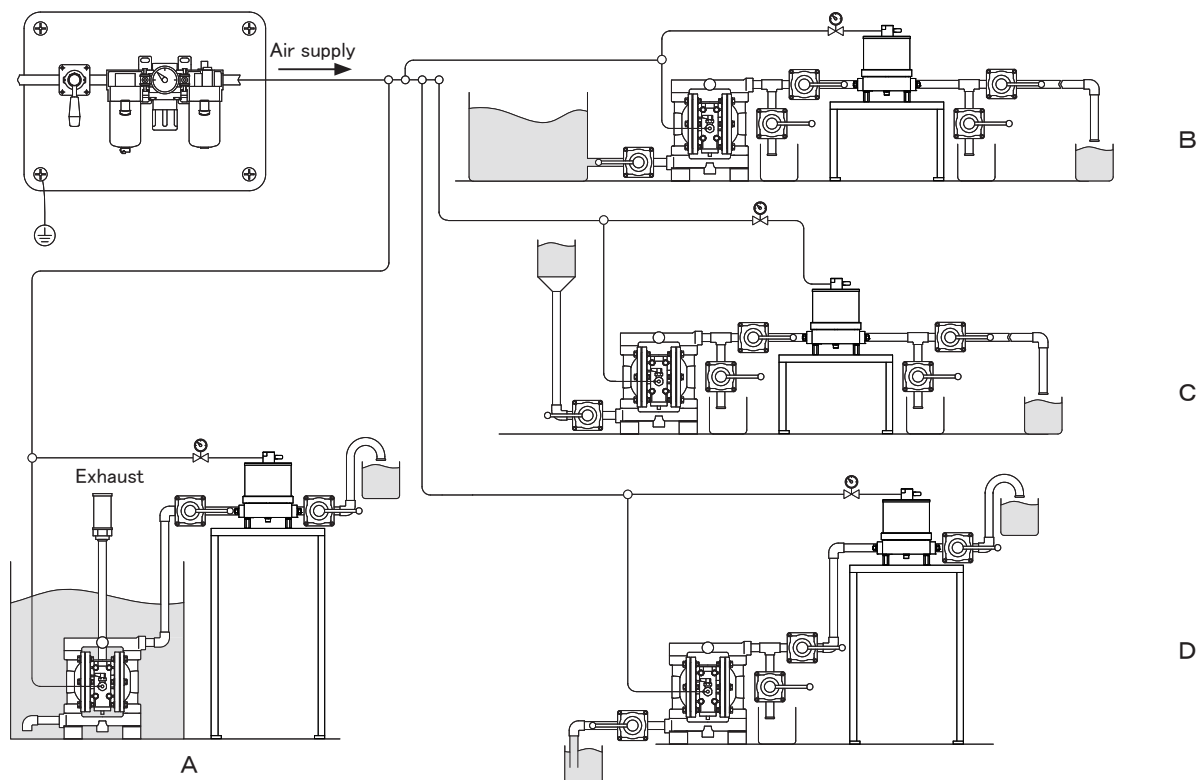

Please fix the dampener with anchor bolts in mounting holes.



CAUTION

- Use a flexible hose between the pump and hard piping to absorb pump or pipe vibration, and ground the hose.
- Make sure that there is no external mechanical force or pressure applied to any connections of the pump. Be especially careful not to allow the pump to support part of the weight of the hose or the piping. If you use a hose of small inner diameter, the pump's performance may be adversely affected, and it may even malfunction.
- When moving the pump, make sure that the pump will not fall. NEVER try to move the pump by pulling the hoses connected to the pump. Either the hose or the pump may be damaged.
- The tightening torque of bolts on this product may decrease over time. Make sure to retighten the bolts in accordance with the service book prior to operation.

Installation




WARNING



• If a diaphragm is damaged, fluid may be ejected along with the air from the exhaust port. In cases when the pump is positioned below the liquid so that hydraulic pressure is acting on the pump, pushing the diaphragms etc, if a diaphragm fails then fluid can flow out of the pump under gravity. Please carryout protective measures, for example, place the pump in a pit, or set the pump into a protection box, use liquid detection through the use of a spill sensor, etc, and at the same time, provide visible warnings signs around the pump.

* Damper exhaust should be directed to a safe place, away from people, animals and food if there is a risk that transferring liquids may affect the human body.


* Connect a hose with an electrical ground wire to the damper's exhaust port, and attach the silencer to the end of the hose. Use a hose of the same diameter as the exhaust port. (If the hose is longer than 5 meters [16.4 feet] , consult your local distributor or our company directly.) Place the exhaust outlet in a pit, or a protection box, etc.

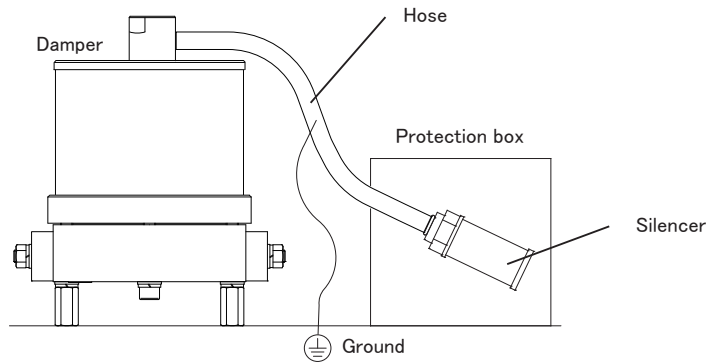




Arranging outside exhaust

2.Recommended Liquid piping connection diagram



- 1) Connect a flow valve and a drain valve to the liquid discharge side (outlet) of the damper.
- 2) Connect a flow valve for maintenance purposes to the suction side (inlet) of the damper.
- 3) Connect hoses to both the suction side and to the discharge side of the damper and attach them to the respective vessels.

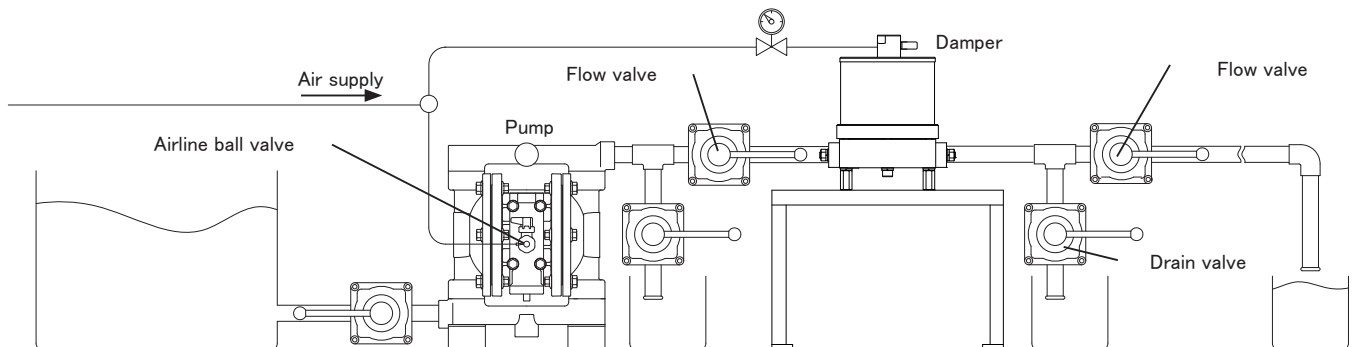

CAUTION

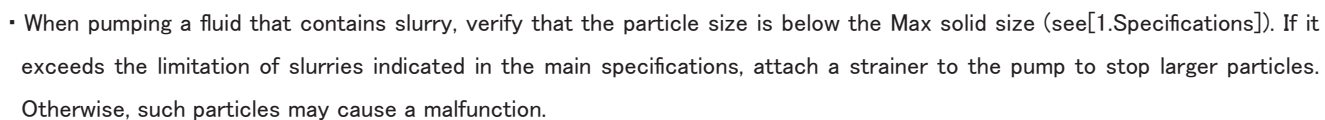

- Connect a hose to the supply port of the dampener after branching it with an air regulator from the air pipe connected to the pump.

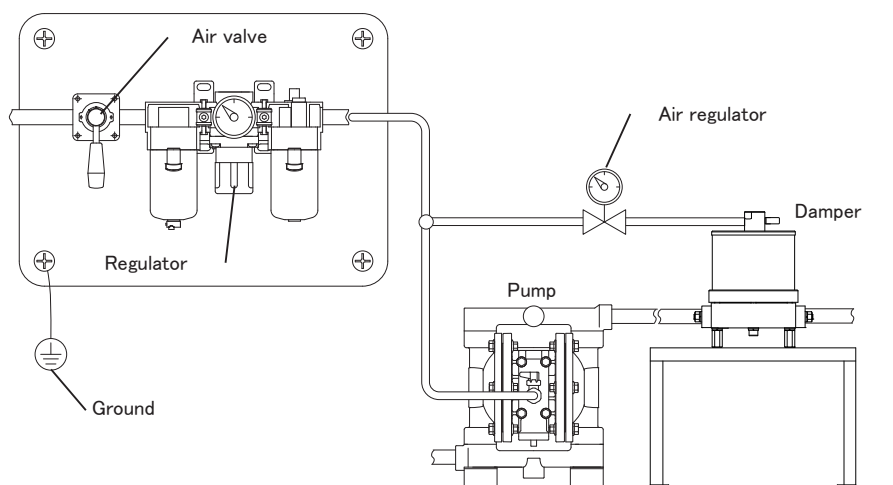

Operation

1.Damper start up

- 1) Open the air valve in front of each piece of peripheral equipment, start the pump.
- 2) Set the supply air pressure to the reference level of "pump discharge pressure $\times 1.1$ " by using the regulator connected to the damper and make a fine adjustment in the range of $\pm 0.05\text{MPa}$ while checking the pulsation as required.



WARNING



- If air pressure and discharge pressure exceed the allowable operating pressure, it may cause liquid leaks, damaged pump casings or diaphragms and could cause a fatal accident.



CAUTION



- If fluid is not discharged after you start the pump, or if you hear an abnormal noise or notice any irregularity, shut down the pump immediately (see [Troubleshooting]).



- Unless the valve on the discharge side is somewhat throttled or piping resistance exists, the pulsation pressure with is not reduced.



- When the damper is installed at the use point at the end of the piping, it provides no effect.

2.Stopping the damper

- After close the air valve of the pump and shut off the supplied air, close the air valve of damper and shut off the supplied air.



CAUTION



- It is permissible to shut down the pump by closing the liquid discharge flow valve even while air is still being supplied to the pump. However, if this condition continues for a long period without supervision, the pump may start running if there is a leak from the pump or piping, and therefore fluid may continue flowing out of the position of leakage.



- When the pump is shut down while pumping liquids containing slurry, particulate slurry matter contained in the liquid can settle and become deposited inside the bottom of the liquid chambers. If the pump is started again in the condition, the diaphragm may be damaged or the center disk may be overloaded, and this may cause damage such as bending or breaking of the center disk or center rod. As a counter measure, after finishing work, it is recommended to purge the remaining fluid and slurry particulate from the pump.

Operation

3.Method of cleaning the damper



WARNING



- Before starting operation, make sure that the pump is not pressurized.



- Be careful when removing any piping from the pump as any remaining fluid may gush out.

- 1) Remove the inlet hose from the suction side of the pump.
- 2) Close the flow valve on the discharge side, open the drain valve, and then operate a pump by opening the air pressure valve for a while to discharge any fluid remaining inside the pump and the damper .
- 3) Remove the outlet hose from the discharge side, and attach different hoses to the suction side and the discharge side for cleaning purposes.
- 4) Prepare the cleaning solution in the tank then insert the inlet hose from the suction side of the pump and the outlet hose from discharge side of the damper into the tank.
- 5) Operate the pump by starting the air pressure slowly, and let the cleaning solution circulate for a sufficient period to thoroughly clean the pump. (Finally, flush the pump with clean water.)
- 6) Remove the hose from the suction side of the pump, run the pump for a while and purge the pump and the damper of all remaining fluid.
- 7) After flushing with clean water, turn the pump upside-down to drain out any remaining water contained in the damper.

Maintenance

▪ Daily maintenance checks

- A) Make sure the air filter drain is empty and working correctly.
- B) Make sure that there is no leakage of fluid from any hose connections or the damper body.
- C) Check each bolt of the pump and retighten as necessary. Refer to the service book for details.
- D) Make sure that there are no cracks in the pump casing or piping.
- E) Make sure that the pipe connections are not loose.
- F) Make sure that high wear parts have not past their life expectancy. Replace such parts at regular intervals. For details, refer to the Service Book.

Some special tools can help when disassembling and reassembling the pump. Please contact your local distributor or our company directly.

Troubleshooting

Problem	Probable Cause	Actions to be taken
Pulsation occurs	The exhaust port (silencer) of damper is clogged with Dirt or sludge.	Check and clean the exhaust port or replace the silencer.
	The exhaust side of the valve seat is worn out, or there is a flaw	Inspect the valve seat for excess wear and replace as necessary.
Liquid leakage from exhaust port with the pulsation	The diaphragm is damaged	Disassemble and check the pump and replace the diaphragm
	The center disk fastening nuts are loose	Disassemble and check the pump. Tighten the nuts.
Air is mixed into the liquid	The diaphragm is damaged	Disassemble and check the pump and replace the diaphragm
	The center disk fastening nuts are loose	Disassemble and check the pump. Tighten the nuts.
	Air leak on (inlet) suction side	Check that inlet hose or hose fittings are not loose or broken and the pump manifold torque values are correct. Check the Inlet manifold O-rings are not damaged or missing.

EU Declaration of Conformity

YTS JAPAN Co., Ltd. declares that Air Operated Double Diaphragm Pumps and Automatic Air Operated Pulsation Dampeners listed below except pumps with electric devices comply with the requirements of directive and all applicable standards.

Applicable EU Directive: 2014/34/EU Equipment and Protective Systems intended for use in potentially Explosive Atmospheres
Applicable Standards: EN80079-36 Non-electrical equipment for explosive atmospheres - Basic method and requirements
EN80079-37 Non-electrical equipment for explosive atmospheres - Non-electrical type of protection constructional safety "c", control of ignition sources "b", liquid immersion "k"

Products: Iwaki "TC-X" Series Air Operated Double Diaphragm Pumps

Pump Series Model	/	Applicable Materials of Construction
TC-X030Model	/	PVDF
TC-X031Model	/	PVDF
TC-X050Model	/	AL, SUS, PVDF, POM, CFPP, CFPTFE
TC-X051Model	/	AL, SUS, PVDF, POM, CFPP, CFPTFE
TC-X101Model	/	AL, SUS, CFPP
TC-X150Model	/	POM
TC-X151Model	/	AL, SUS, PVDF, POM
TC-X152Model ^{A)}	/	AL, SUS, PVDF, POM, CFPP, CFPTFE
TC-X200Model ^{B)}	/	AL, SUS, PVDF
TC-X250Model ^{B)}	/	AL, SUS, FE, PVDF, CFPP, CFPTFE
TC-X400Model	/	AL, SUS, FE, PVDF, CFPP
TC-X500Model ^{C)}	/	AL, SUS, FE, PVDF, CFPP
TC-X800Model ^{C)}	/	AL, SUS, FE

A) With CFPP Air Motor

B) With CFPP or Metallic Air Motor

C) With C, N, E, V, W Diaphragms or PTFE Diaphragm Fitted with Conductive TPEE back up or Conductive EPDM back up

Products: Iwaki "CF-X" Series Automatic Air Operated Pulsation Dampeners

Dampeners Series Model	/	Applicable Materials of Construction
CF-X10Model	/	AL, SUS, CFPP
CF-X15Model	/	AL, SUS, PVDF, POM, CFPP, CFPTFE
CF-X25Model	/	AL, SUS, FE, PVDF, CFPP, CFPTFE
CF-X40Model	/	AL, SUS, FE, PVDF, CFPP
CF-X50Model ^{D)}	/	AL, SUS, FE, PVDF, CFPP

D) With C, N, E, V, W Diaphragms or PTFE Diaphragm Fitted with Conductive TPEE back up or Conductive EPDM back up

Hazardous Location Applied:

Ex II2G Exh IIBT5Gb $0^{\circ}\text{C} \leq T_a \leq 70^{\circ}\text{C}$

Ex II2D Exh IIIIBT100^{\circ}\text{C} Db $0^{\circ}\text{C} \leq T_a \leq 70^{\circ}\text{C}$

Equipment group II, (subgroup IIB), temperature class T5, EPL Gb

Equipment group III, (subgroup IIIB), temperature class 100^{\circ}\text{C}, EPL Db

Technical file has been stored at ExNB 0035 (TÜV Rheinland Industrie Service GmbH) with reference number 557Ex-Ab3825/23 according to rule 2014/34/EU.

Products Manufactured By:

YTS JAPAN Co., Ltd.

598-10 Monoi, Yotsukaido-City, Chiba, Japan, 284-0012

Phone: +81(0)433106606 / Fax: +81(0)434248977

E-Mail: sales@yts-pump.com / Web: https://www.y-t-s.co.jp/



DATE/APPROVAL/TITLE
December 18th 2024

Shigeru Murata

Shigeru Murata
Director of Quality Assurance
YTS JAPAN Co., Ltd.

EU Declaration of Conformity

Declaration of Conformity / Déclaration de Conformité / Declaración de Conformidad / Erklärung
Bezüglich / Einhaltung Der Vorschriften / Dichiarazione di Conformità / Conformiteitsverklaring

YTS JAPAN Co., Ltd. declares that Air Operated Double Diaphragm Pumps ("TC-X" Series) and Automatic Air Operated Pulsation Dampeners ("CF-X" Series) and Pump Accessories (listed: KGD30-09) comply with the requirements of directive and all applicable standards.

Applicable EU Directive: 2006/42/EC machinery directive
Applicable Standards: EN809 Pumps and pump units for liquids –
Common safety requirements

Products Manufactured By: YTS JAPAN Co., Ltd.

598-10 Monoi, Yotsukaido-City, Chiba, Japan, 284-0012

Phone: +81 (0)433106606 / Fax: +81 (0)434248977

E-Mail: sales@yts-pump.com / Web: <https://www.y-t-s.co.jp/>

Authorized Representative: YTS Pump Engineering BV.

Logistiekweg 26, 7007 CJ Doetinchem, the Netherlands

Phone: +31 (0)857607060

E-mail: info@yts-pumps.com / Web: <https://www.yts-pump.com/>



DATE/APPROVAL/TITLE
December 18th 2024

Manufacturer:

Shigeru Murata
Director of Quality Assurance
YTS JAPAN Co., Ltd.

CE Authorized Representative:

Gerard Heikens
Managing Director
YTS Pump Engineering BV.

